




Releasable and reusable cable ties, suitable for temporary bundling and when open/close function is necessary in different industrial and commercial applications

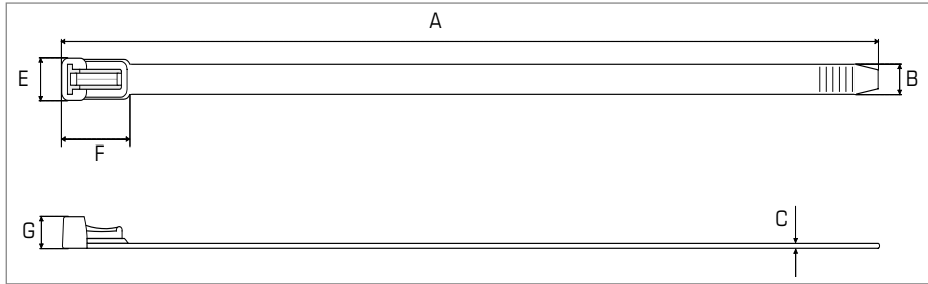

COLORS

- Natural
- Black

MATERIALS

Material: polyamide 6.6 + ~ 1% carbon black for the black version

Halogen free

Material flammability rating:

UL 94-V2

Excellent resistance to: aromatic solvents, oils, greases and derivatives

Good resistance to: bases

Limited resistance to: acids

Not resistant to: phenols and to chlorinated solvents

APPLICATION

Installation temperature:

-10°C ÷ 60°C

Working temperature:

-40°C ÷ 85°C

PRODUCTS CONFORMITY:

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

Type 1

REACH: the materials used to produce the cable ties comply with 1907/2006/CE (REACH)

Technical Data

CODE		NOMINAL DIMENSIONS						BUNDLE DIAMETER	
Natural	Black	(mm) A	(mm) B	(mm) C	(mm) E	(mm) F	(mm) G	(mm) ø min	(mm) ø max
5250	5350	200	7,5	1,25	10,6	21	7,9	6	50
5252	5352	250	7,5	1,25	10,6	21	7,9	6	65
5254	5354	350	7,5	1,25	10,6	21	7,9	6	100

Mechanical features and packaging

CODE		MECHANICAL FEATURES	PACKAGING	
Natural	Black	Newton (N) Tensile strength*	(pcs) Bag	(pcs) Box
5250	5350	220	100	6.000
5252	5352	220	100	4.000
5254	5354	220	100	3.500

*Please consider a suitable safety factor equal or above 2